


# MODEL HP-2

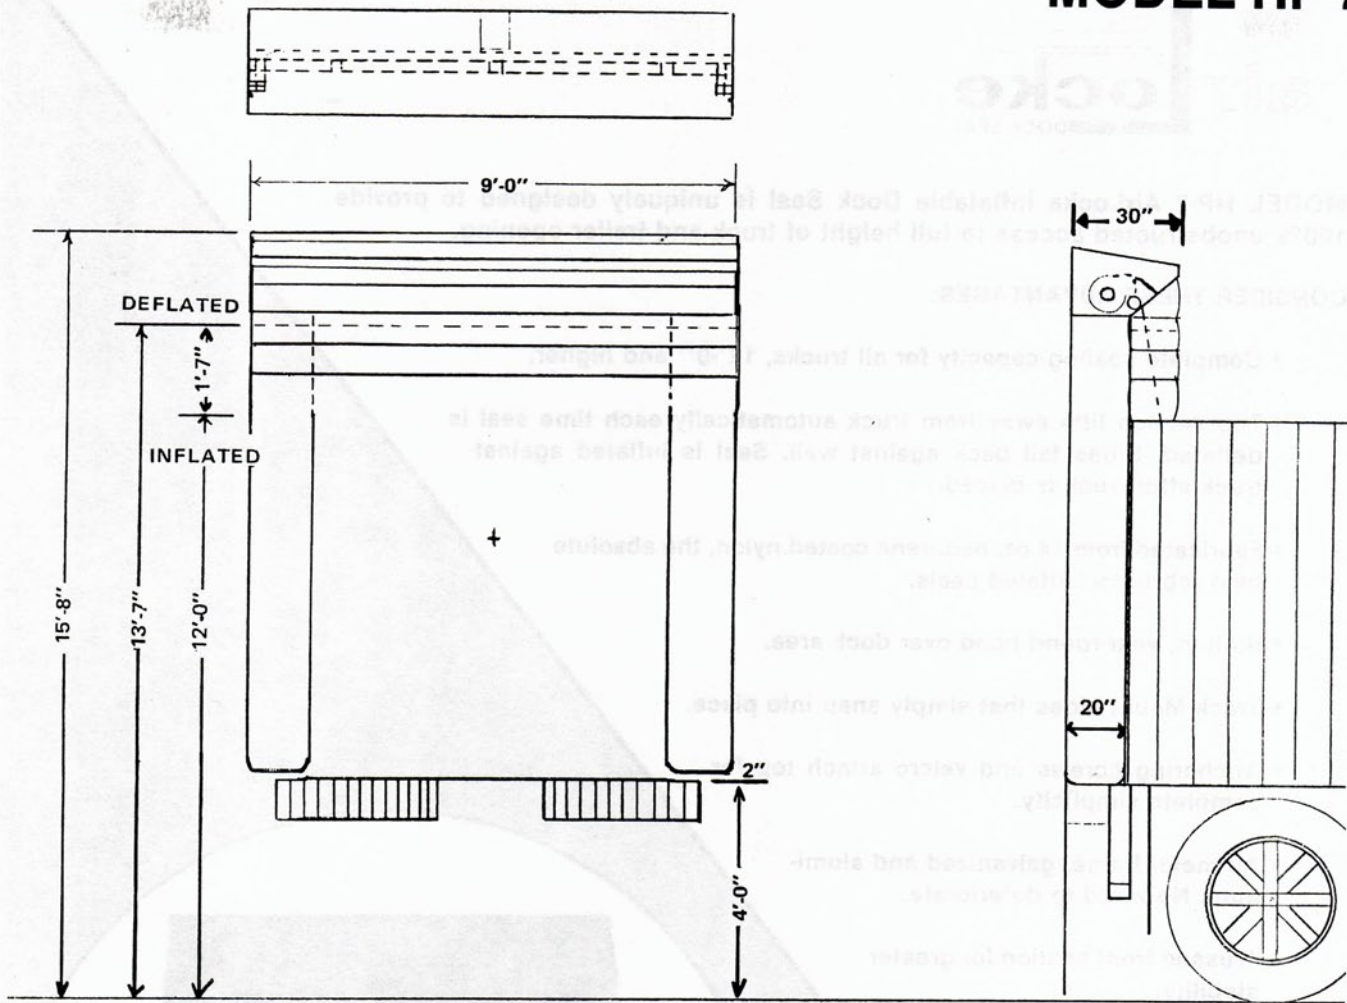

## SPECIFICATIONS - MODEL HP-2

**Material** - 14 oz. per sq. yd. Neoprene coated Nylon. Remains flexible to 40° below 0° Fahrenheit.

**Construction** - Sewn entirely with dacron thread.

**Blower** - 1/10 H.P. squirrel cage type, 1 ph, 115 V, 60Hz, 1.43A, complete with attachments for mounting.

**Sealing Capacity** - 7'-6" to 8'-6" wide and 12'-0" to 13'-6" high.

**Ideal Door Size** - Up to 8'-0" x 10'-0" - 48 inch high dock.

**Electrical Requirements** - Switched 115 V outlet\* beside door by others. (12 ft. grounded cord and plug furnished will plug into this outlet). If desired, cord can be removed from junction box on blower and building wiring run from switch to blower by electrical contractor. 3.25 AMP

\*Recommended use of Pilot Light.

**Short Form Specifications** - Furnish and install in locations as indicated AirLocke Dock Seal Model HP-2 loading dock seal as manufactured by O'Neal's Tarpaulin & Awning Co., 549 W. Indianola Avenue, Youngstown, Ohio 44511. Electrical connections by others.

### AIRLOCKE DOCK SEAL

Division of O'Neal Tarpaulin Co.  
549 W. Indianola Ave. - Youngstown, Ohio 44511  
Telephone: (330) 788-6504  
FAX: (330) 788-6705

Distributed By: