

AIRLOCKE DOCK SEAL

Model SP Inflatable Dock Seal




Consider these Advantages

- *Inflated sections on top and sides seal tightly with no intrusion into the rear opening of the truck*
- *Blower and frame are mounted above the seal and out of the way of docking truck; no possibility of damage to the building or seal*
- *Inflates to form a weather-tight insulating (65 cu. ft. of air seal between truck and dock opening)—keeps inclement weather out; heated and air-conditioned air in.*
- *Fabricated from heavy duty vinyl coated nylon and sewn with Dacron thread.*
- *Seals trucks from 12'-0" to 13'-8" high and provides an opening up to 8'-0" wide*

AIRLOCKE DOCK SEAL

**549 W. Indianola Ave.
Youngstown, Ohio 44511**


Phone: 330-788-6504
Toll Free: 1-800-538-2388
Fax: 330-788-6705

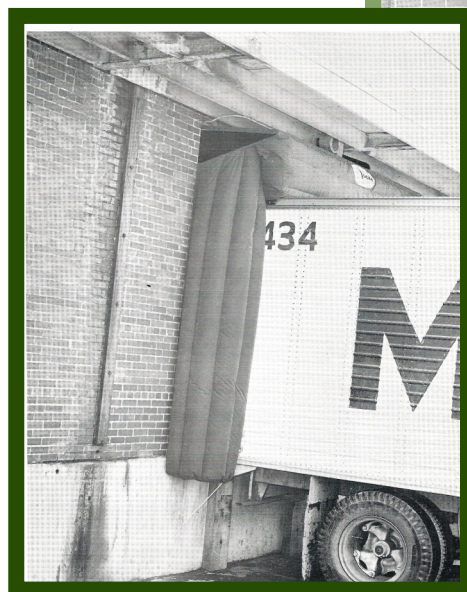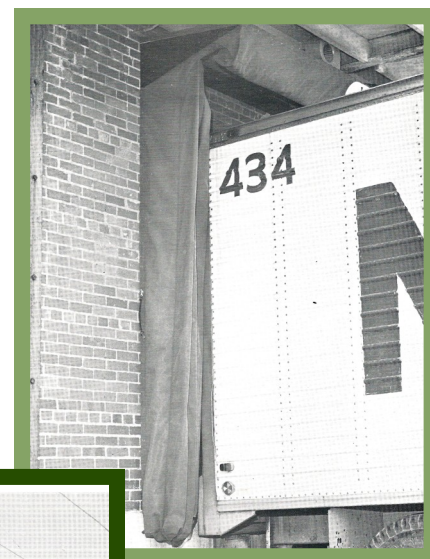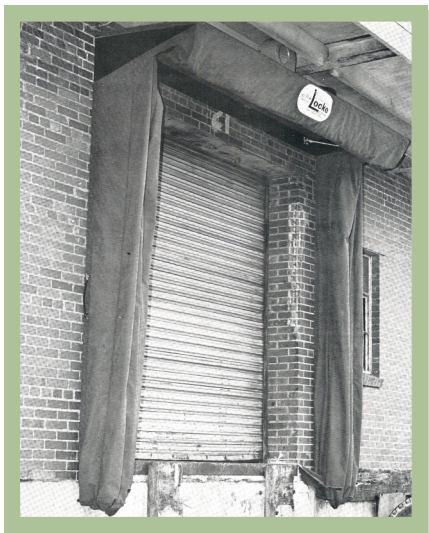

Model SP AirLocke Inflatable Dock Seal is uniquely designed to provide 100% unobstructed access to truck and trailer openings

www.airlocke.com

MODEL SP (Safe Perimeter Seal)

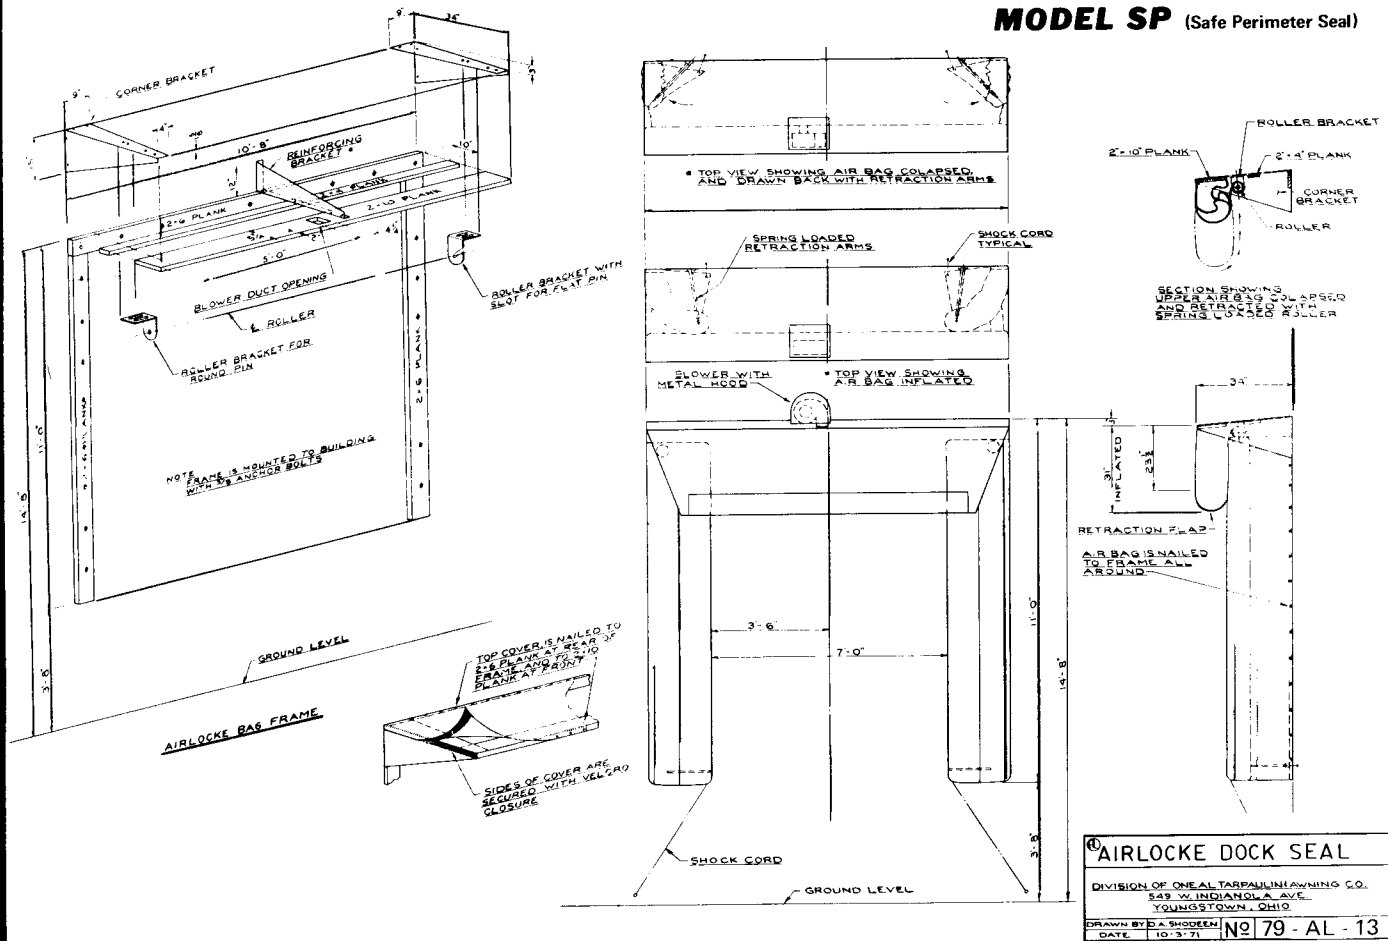

AIRLOCKE DOCK SEAL
 DIVISION OF ONEAL TARPULIN COMPANY
 549 W. INDIANOLA AVE.
 YOUNGSTOWN, OHIO
 DRAWN BY: A. SHOEER
 DATE: 10-5-71

SPECIFICATIONS — MODEL SP

Material - 14 oz. per sq. yd. Neoprene Coated Nylon. Remains flexible to 40° below 0° Fahrenheit.

Construction - Sewn entirely with dacron thread.

Blower - 1/10 H.P. shaded pole, squirrel cage type, 1 phase, 110 V, 60 cycle, complete with all attachments for mounting.

Sealing Capacity - 7'-6" to 8'-6" wide and 12'-0" to 13'-6" high.

Mounting Plank Requirements - (Furnish Locally)

- 1 - 2 x 10 Plank - 10'-7 3/4" long
- 2 - 2 x 6 Planks - 10'-6 1/2" long
- 1 - 2 x 6 Plank - 10'-8" long
- 1 - 2 x 4 Plank - 10'-7 3/4" long

Ideal Door Size - Up to 10'-0" x 10'-0" - 48 inch high dock.

Electrical Requirements - Switched 110 V outlet* beside door by others. (12 ft. grounded cord and plug furnished will plug into this outlet). If desired, cord can be removed from junction box on blower and building wiring run from switch to blower by electrical contractor. 3.25 AMP
 *Recommended use of Pilot Light.

Short Form Specifications - Furnish and install in locations as indicated AirLocke Dock Seal Model SP loading dock seal as manufactured by O'Neal Tarpaulin Co., 549 W. Indianola Avenue, Youngstown, Ohio 44511. Mounting planks and electrical connections by others.

AIRLOCKE DOCK SEAL
 Division of O'Neal Tarpaulin Co.
 549 W. Indianola Ave. - Youngstown, Ohio 44511
 Telephone: 330/788-6504

Distributed By: