


# MODEL VEN/14

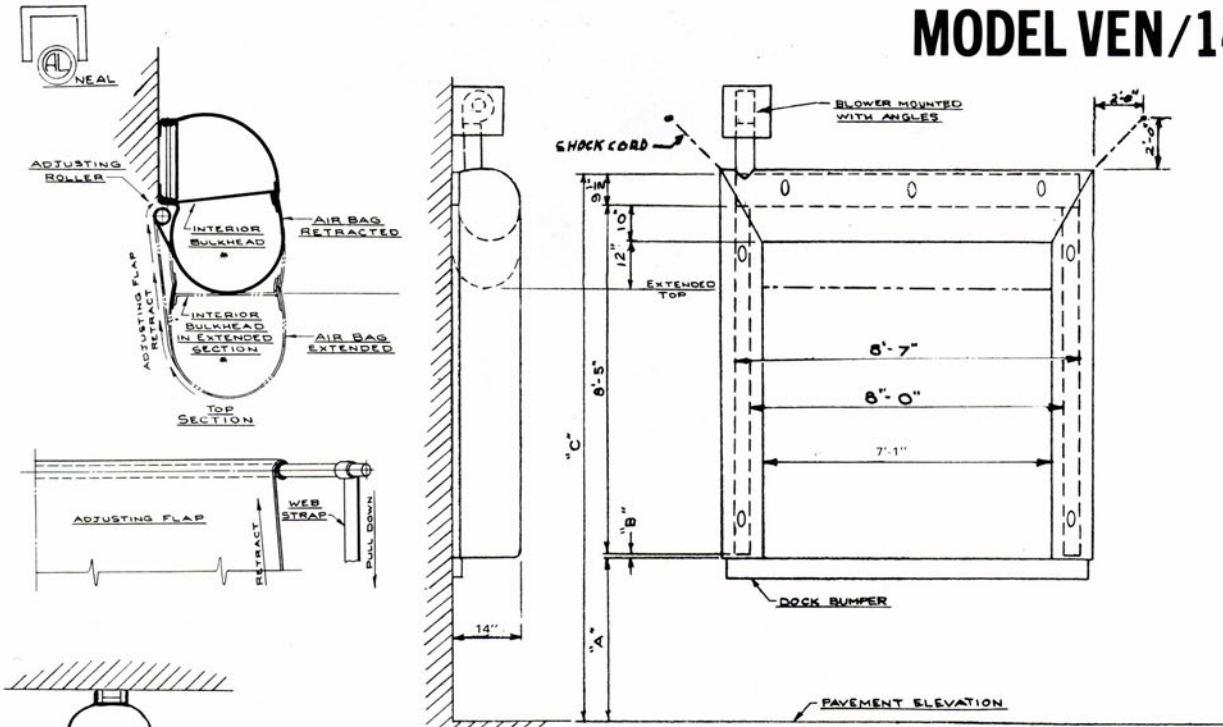

MOUNT AS FOLLOWS FOR LISTED DOCK HEIGHTS

"A"	"B" ALUMINUM "H" SECTION FROM FLOOR	"C" GROUND TO TOP OF 2 x 10	SEALS TRUCKS
46"	3"	13'- 3 1/2"	10'- 11" TO 13'- 5" HIGH
47"	3"	13'- 4 1/2"	11'- 0" TO 13'- 6" HIGH
48"	2"	13'- 4 1/2"	11'- 0" TO 13'- 6" HIGH
49"	1"	13'- 4 1/2"	11'- 0" TO 13'- 6" HIGH
50"	1"	13'- 5 1/2"	11'- 1" TO 13'- 6" HIGH

AIRLOCKE DOCK SEAL	
DIVISION OF ONEAL TARPULIN (AWNING CO. 549 W. INDIANOLA AVE. YOUNGSTOWN, OHIO	
DRAWN BY D.SHODEEN	NO 179 - AL - 3
DATE 4-3-72	

CROSS SECTION OF AIRLOCKE BAG AND MOUNTING AT SIDES OF DOCK SEAL

## SPECIFICATIONS — MODEL VEN/14

**Material** - 14 oz. per sq. yd. Neoprene Coated Nylon (\*Remains flexible to 40° below 0° Fahrenheit.)

**Blower** - 1/10 H.P. shaded pole, squirrel cage type, 1 phase, 110 V, 60 cycle, complete with all attachments for mounting outside of building with protective hood. (Inside mounting available).

**Sealing Capacity** - Trucks 7 1/2 to 8 ft. wide and 11'-0" to 13'-6" high on 46 to 50 inch high docks.\*  
\*(50" high dock seals trucks 11'-1" to 13'-6").

**Mounting** - 3-piece aluminum frame is inserted in AirLocke and attached with 7 hidden "twist lock" fittings (patent pending). Can also be furnished for standard lumber mounting if specified (lumber to be furnished locally).

**Ideal Door Size** - 8'-0" wide x 8 or 9 ft. high - 48" dock.

**Electrical Requirements** - Switched 110 V outlet\* beside door by others. (12 ft. grounded cord and plug furnished will plug into this outlet.) If desired, cord can be removed from junction box on blower and building wiring run from switch to blower by electrical contractor. 3.25 AMP.

\*Recommended use of Pilot Light

**Short Form Specifications** - Furnish and install in locations as indicated AirLocke Dock Seal Model VEN/14 as manufactured by O'Neal Tarpaulin Co., 549 W. Indianola Avenue, Youngstown, Ohio 44511. Electrical connections by others.

**AIRLOCKE DOCK SEAL**  
Division of O'Neal Tarpaulin Co.  
549 W. Indianola Ave. - Youngstown, Ohio 44511  
Telephone: (216) 788-6504

Distributed By: